



LED-M8T

Receiving card




Product Specification

V1.0

LED-M8T Receiving Card

- **Product Description**

LED-M8T is an universal FPGA receiving card which integrates 8 × HUB75E interfaces, the maximum loading capacity is 192K(512*384) pixels and used with the CLINK software, it is more stable and reliable under the premise of ensuring the display effect.

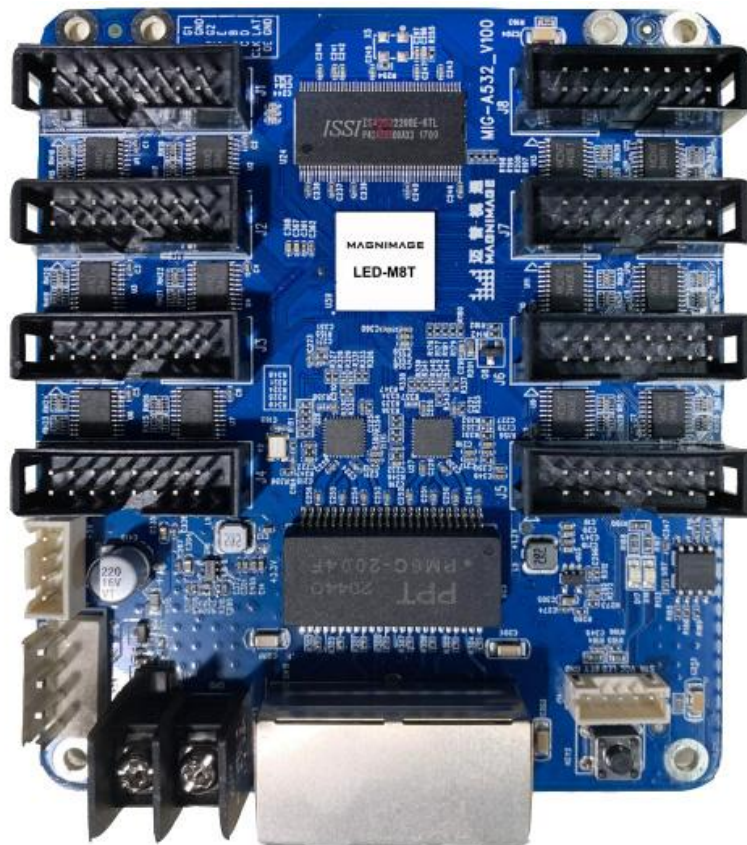

● Loading Capacity

| Three-wire parallel (RGB) | Max. Loading capacity (pixel) | Quantity of cascade cards | Scan row |
|---------------------------|-------------------------------|---------------------------|-----------|
| 16 groups | 512*384 | ≤128PCS | 1-64 scan |

● Improvement of Display Quality

| | |
|---------------------------------|--|
| Customized RGB Gamma adjustment | Independent adjustment for red/green/blue Gamma to solve the problem of image non-uniformity and white balance under low gray level. |
| Bright & dark line quick repair | Eliminates the bright and dark lines during the LED screen installation period. |
| Brightness & Chroma calibration | With the help of calibration software, the problem of inconsistent brightness on the screen can be eliminated, and the color uniformity of the screen is better. |
| N* 90° rotation | Rotate the video source by every N*90°. |
| Mirror display | Mirror display of horizontal or vertical. |

● Easier Operation

| | |
|--|---|
| Free cable-connection | The loading area of a single signal cable is no longer limited to be rectangular. No more waste of equipment and cost-saving. |
| Communication detection | Check the communication quality between the network ports, cooperate with the the indicator flashing light, the hidden problem links can be quickly located. |
| Loading capacity expansion | With the equipment that supports loading expansion function, the single network port can loading 1,000,000 pixels after the function is turned on in the CLINK software. |
| No need reconfigure for card replacement | After replacing the receiving card, there is no need to resend the configuration file and screen connection. |
| Smart sequencing | After turn on this function on CLink software, the receiving card number and network port information will be displayed on the LED panel, so that the location and cable connection mode can be clearly seen. |
| No need to upgrade | The factory firmware program is compatible with conventional and most of the dual latch, PWM driver IC. |


| | |
|----------------------------------|---|
| Configuration parameter readback | Support the configuration parameter of receiving card readback. |
| Prestore image | Display the image when no input signal or signal cut-off. |

● Improvement of the Stability

| | |
|--|--|
| Network port backup | The network port can be used for input or output both way, support hot backup of main and backup cable. |
| No System Breakdown (firmware read back) | The firmware program of receiving card can restore the factory settings and readback to prevent card system breakdown after upgrading. |
| Bit error rate detection | Test the communication quality of the system, record the error and solve the communication issue. |

● Output Interface Definition

Definition of 16 groups parallel data interfaces

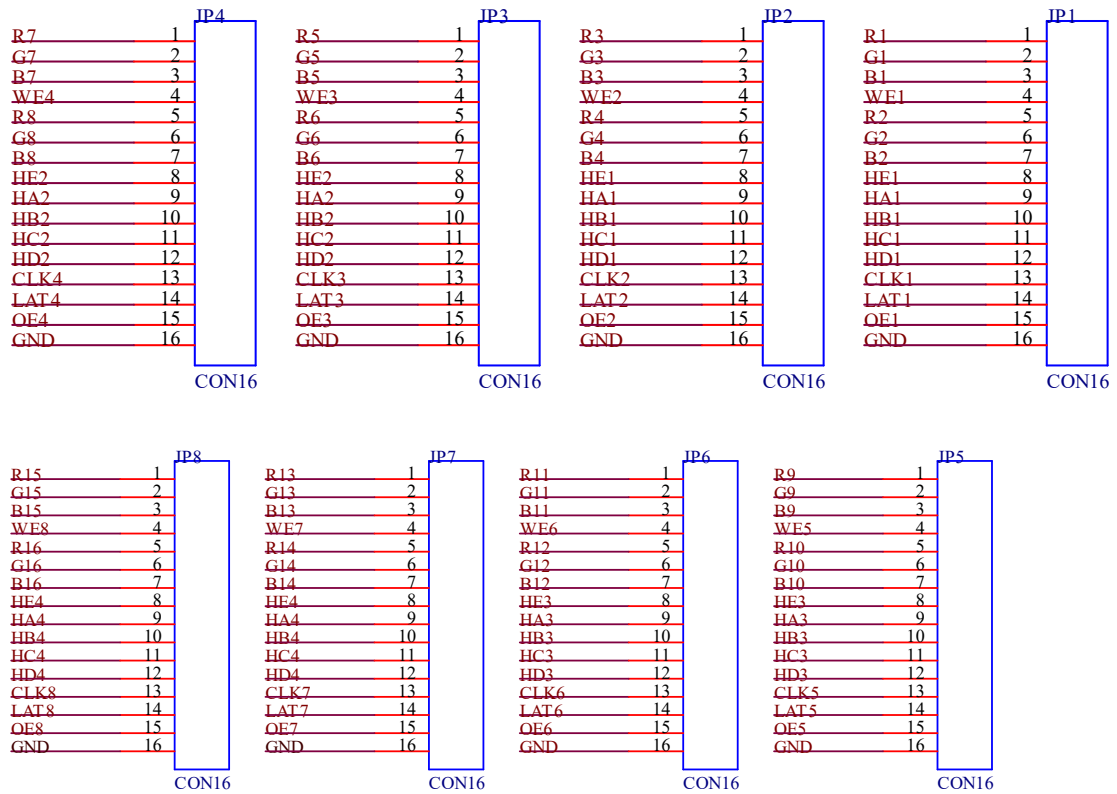

JP1-JP16 Interface Definition

| | | | | | | | | |
|------------|----|-----|----|----|----|----|-----|-----|
| Pin | 1 | 3 | 5 | 7 | 9 | 11 | 13 | 15 |
| Definition | R0 | B0 | R1 | B1 | A | C | CLK | OE |
| Pin | 2 | 4 | 6 | 8 | 10 | 12 | 14 | 16 |
| Definition | G0 | GND | G1 | E | B | D | LAT | GND |


JP12 Interface Definition

| | | | | | |
|------------|----------|------|-------|----------|---------|
| Pin | 1 | 2 | 3 | 4 | 5 |
| Definition | GND/KEY- | KEY+ | LEDR- | VCC/LED+ | LED(G)- |


- **Indicator Light Specification**

| Indicator | Position | Status | Description |
|--------------------------|----------|------------------------------|---|
| Status Indicator (Green) | U3 | Slow flash regularly | The receiving card works normally,the network cable connects normally, no DVI signal input |
| | | Fast flash regularly | The receiving card works normally,the network cable connects normally,with DVI signal input |
| | | Always Off | No Gigabit network signal |
| | | Flashes at 3 times intervals | The receiving card works normally,the network cable loop connects,with DVI signal input |
| Status Indicator | U1 | Always ON | Power supply is normal |

● Product Picture

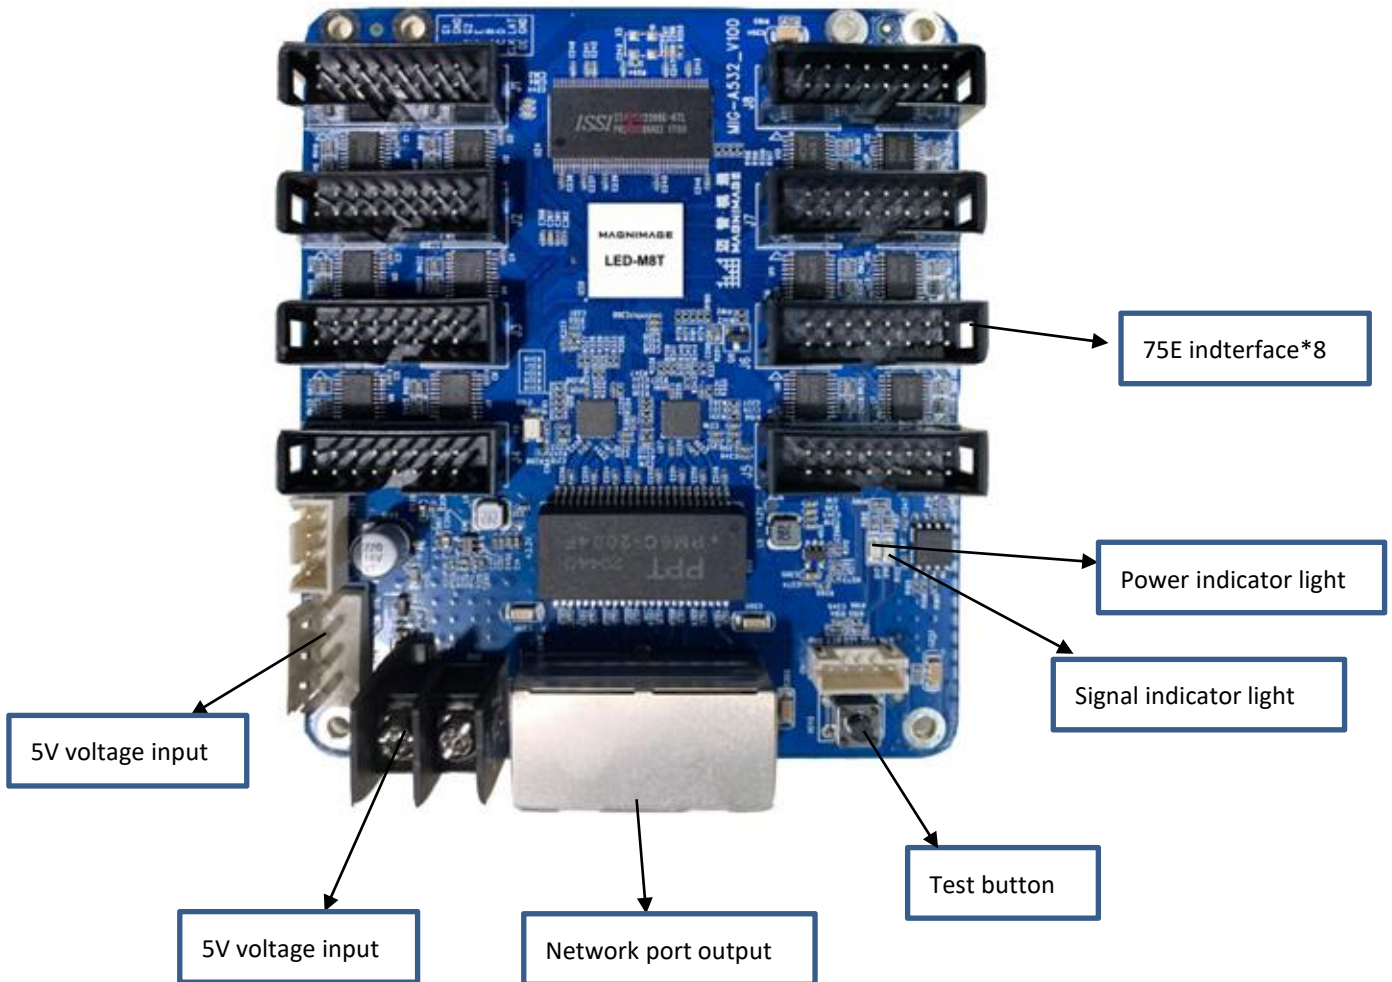

● Product Dimension (unit: mm)

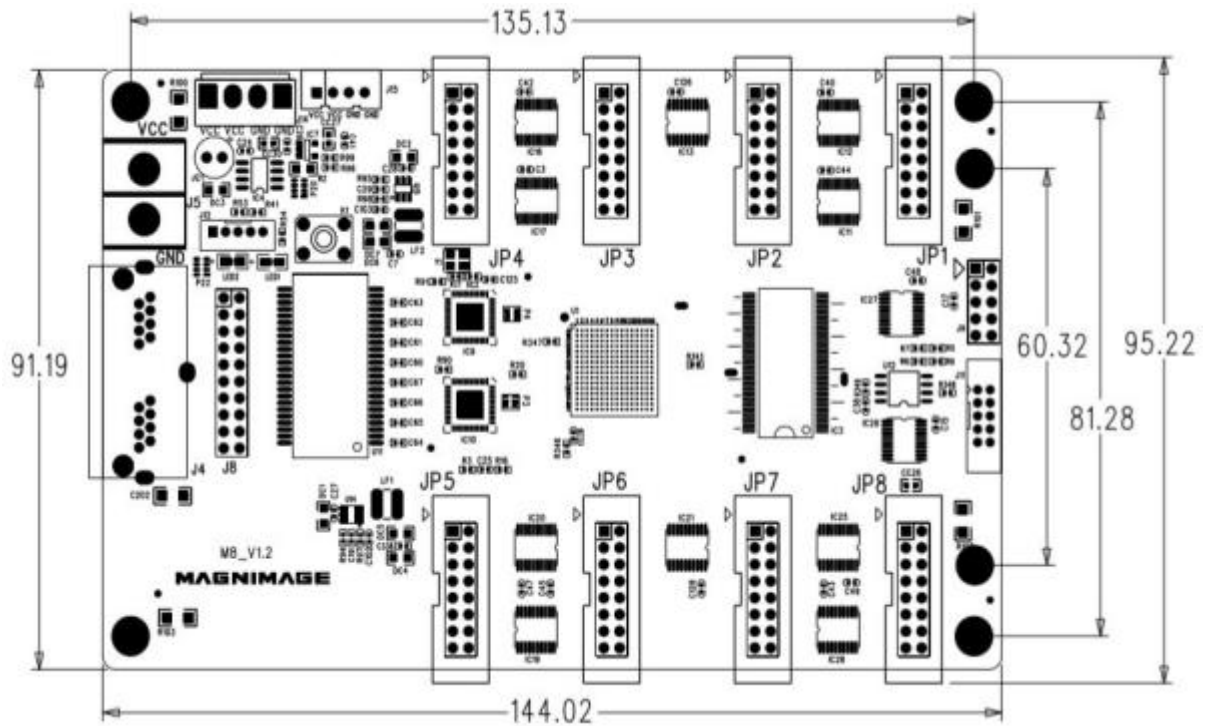

● Parameters

| | | |
|-----------------------|---------------------|--------------|
| Electrical parameters | Input voltage | DC3.5-5.5V |
| | Rated current | 0.6A |
| | Rated power | 3W |
| Working environment | Working temperature | -20°C - 70°C |

| | | |
|---------------------|----------------------------------|-------------|
| | Working humidity | 10%RH-90%RH |
| Storage environment | Temperature | -25℃ ~ 125℃ |
| Card dimension | 144.02mmX91.2mm | |
| Net weight | 65g | |
| Certification | RoHS compliant, CE-EMC compliant | |

● **Notes**

- (1) The installation process should be completed by professionals.
- (2) It must be anti-static.
- (3) Need to keep waterproof and dust-proof.

24h 400-6868-203

Shenzhen Magnimage Technology Co., Ltd.

Address: 8F, Bld. F5, TCL International E City, #1001
 Zhongshan Park Road, Nanshan, Shenzhen, China, 518052
 Tel: 0755-86647651 Fax: 0755-86647650
 Website: www.magnimage.com

