




LED-F903 is a video controller that integrates video processor and sending card function. It has a variety of video image input interfaces, including 1×HDMI2.0, 1×DVI(HDMI1.4)&DP1.1, 1×DVI, and one audio input, expandable with 1×3G SDI. The output supports 6 ports of gigabit Ethernet (3 main 3 backup), 1×HDMI LOOP and one audio output. The loading capability of single port can reach 2.2M pixels(60Hz), The whole machine loading up to 6.6 million pixels. maximum width can be 8192 and maximum height can be 3840, and support customized output resolution.

LED-F903 support the function of quick light-up screen without computer software connection, greatly simplify the setting steps.


Features

- 6 layers display
- Input EDID management
- Smart sequencing
- Support Key lock
- Support scrolling caption
- Support 4K*2K/60Hz(HDMI 2.0) input
- Support layer size and position adjustment and image crop
- Quick light-up screen, no need computer software connection
- 6 channels gigabit Ethernet output (3 main 3 backup)
- support customized output resolution
- Free image zooming
- Save and load template
- Multi-cascade mosaic
- Seamless switching for input source and preset
- Support external independent audio input/output
- Support connection with C-Link series receiving card
- Single input signal cut switch seamless switching with no black screen
- Support network interface communication, wireless Control screen

Panel Introduction

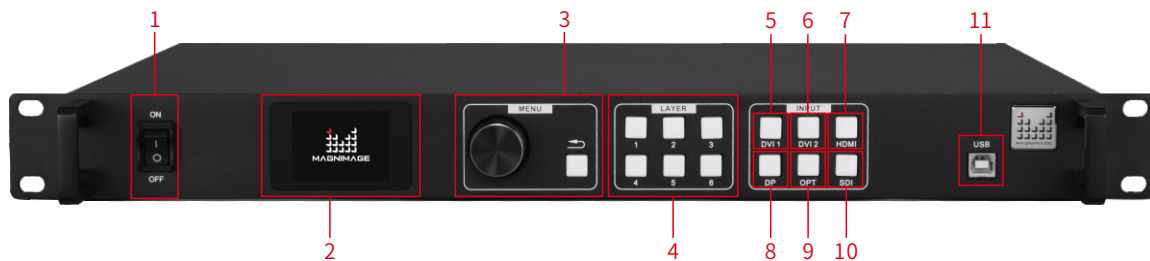

- ① Power switch
- ② LCD display
- ③ Knob/OK/Return button
- ④ Layer selection button
- ⑤ DVI 1
- ⑥ DVI 2
- ⑦ HDMI
- ⑧ DP
- ⑨ OPT
- ⑩ SDI
- ⑩ USB control port

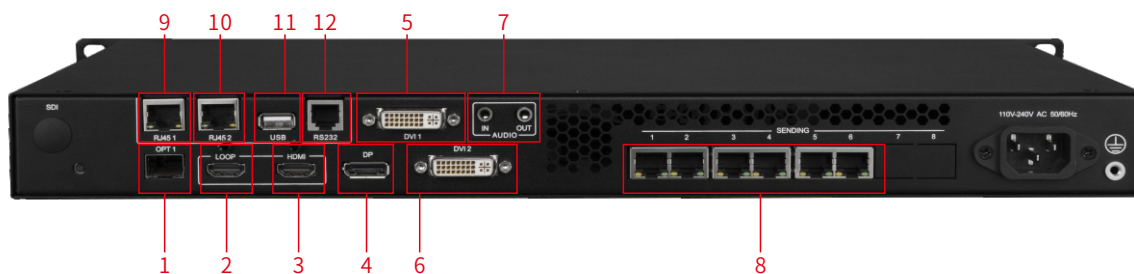


- ① OPT 1
- ② HDMI LOOP
- ③ HDMI 2.0 input
- ④ DP 1.1 input
- ⑤ DVI1 input
- ⑥ DVI 2 input
- ⑦ Audio input/output
- ⑧ 6 channels gigabit Ethernet output
- ⑨ RJ45-1
- ⑩ RJ45-2
- ⑪ USB upgrade port
- ⑫ RS232 control port

▮ Main Features and Characteristics

● Fast light-up screen

LED-F903 can quickly configure parameters of whole LED screen (including screen connection/resolution setting/display size setting ect.) through guide menu, knob and button, light-up screen in a few steps, no need computer software connection.

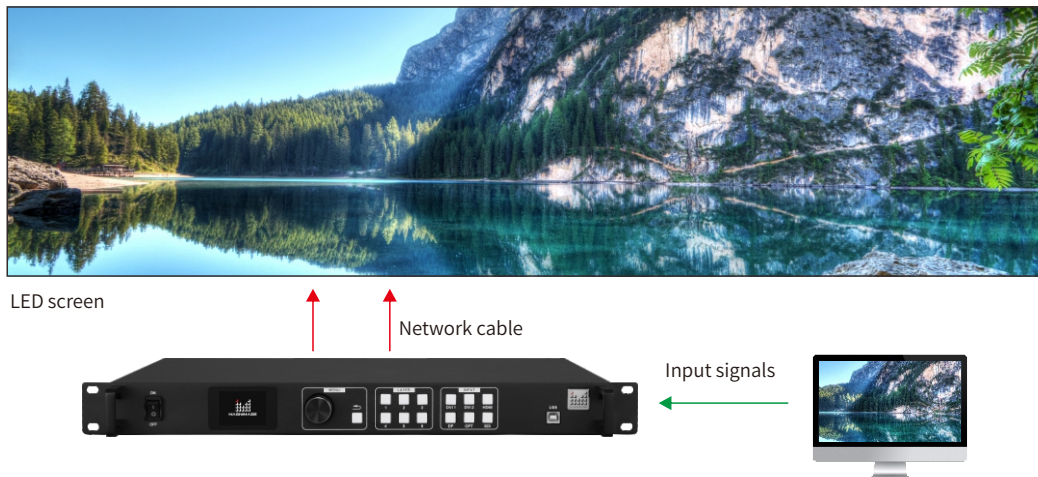

● Optical port transmission


Optical port is connected to fiber converter through optical fiber which is converted to network cable to connect to big LED screen, solving the problem of long-distance transmission.



▮ Main Features and Characteristics


● 6 layers seamless switching

LED-F903 can realize 6 independent layers output(One 4K layer and Five 2K layer),and the size/position can be adjusted arbitrarily. Single input signal cut switch or multi-layers seamless switching with no black screen.

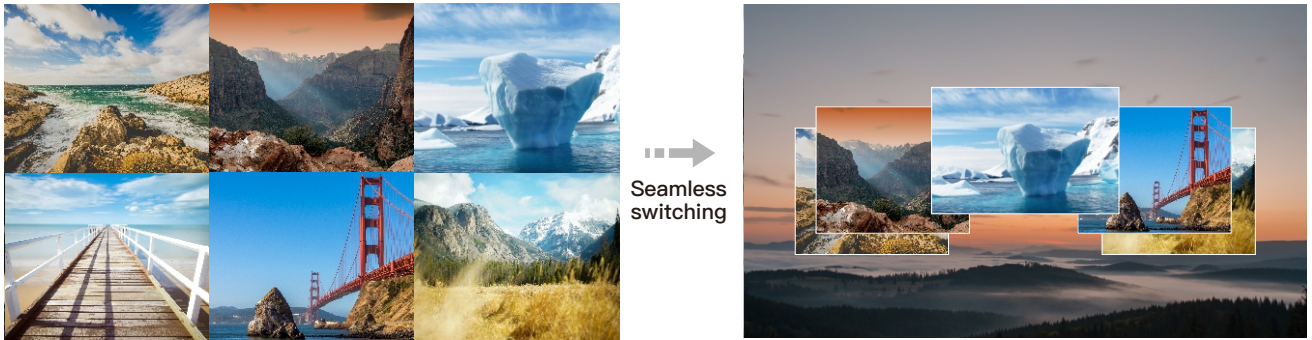

● super large load ability

Breaking through the tradition with unique super large loading function,the loading capability of single port can reach 2.2M pixels(60Hz).

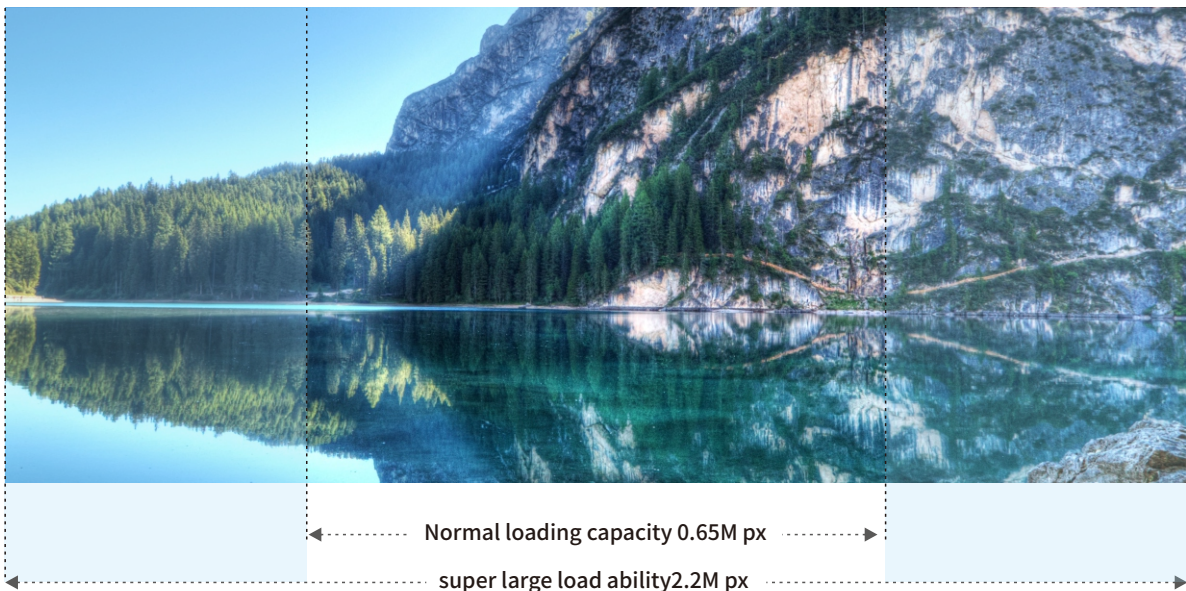

▮ Main Features and Characteristics

● Audio split output

Support external audio input/output, HDMI audio split output.



LED screen




● Multi-cascade mosaic

Support multi-machine concatenation, easy to achieve large resolution LED screen splicing.

13.2M px



LED screen

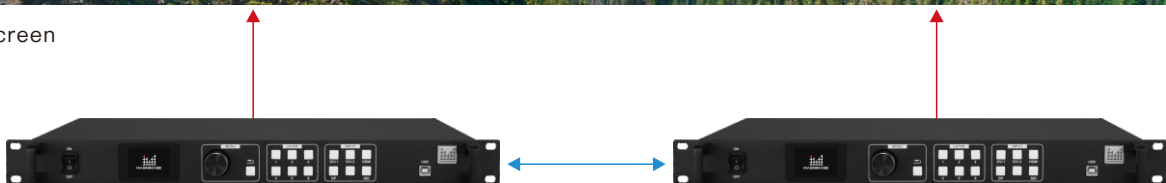

▮ Main Features and Characteristics


🔴 Scrolling caption

Edit text content, size, color, scrolling speed and background color through software.



🔴 4K@60Hz RGB 4:4:4

Input, output and internal processing are all RGB 4:4:4 sampling, which can accurately restore the signal source image details. The image display is clear and delicate. At the same time, there is no frame reducing or losing for the whole channel processing of the processor, so the video is played more smoothly, and the image details are fully displayed

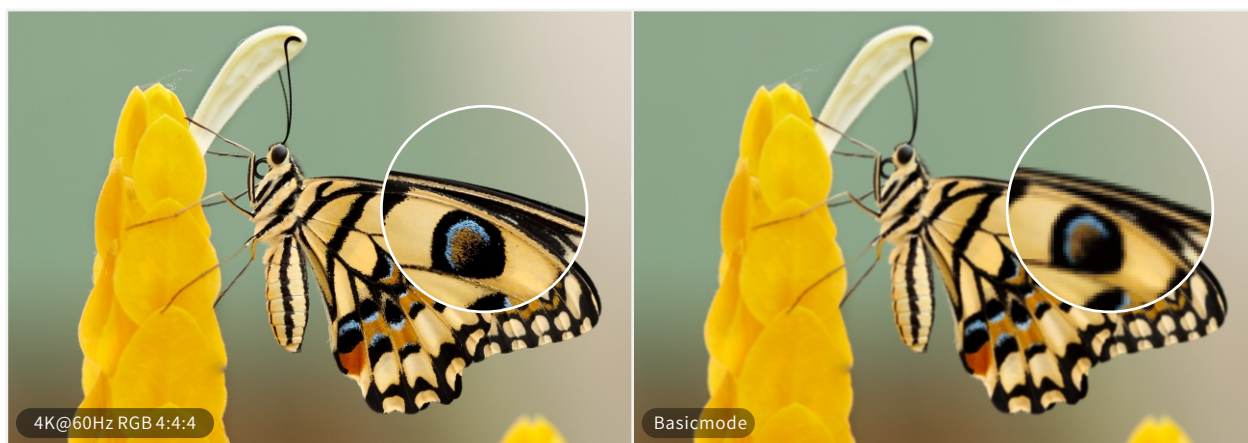

Technical parameters

Model

Model	Specification
LED-F903	Standard model
LED-F903S	Standard model+SDI input port*1

Input specification

Port	Quantity	Resolution specification
DVI2	1	HDMI1.4 protocol,3840×1080/60Hz and customized
DP1.1	1	3840×1080/60Hz and customized
HDMI2.0	1	3840×2160/60Hz and customized
DVI	1	HDMI1.4p rotocol,3840×1080/60Hz and customized
SDI(Optional)	1	720P,1080i/60Hz,1080P/60Hz 3G SDI standard
AUDIO IN	1	3.5mm audio port

*choose between DVI 2 and DP to use at one time.

Output specification

Port	Quantity	Resolution specification
Ethernet port (connect receiving card)	6	6.6 million pixels loading for the whole machine, 3 main 3 backup and 2.2 million pixels loading on a single network port max horizontal 8192 px, max vertical 3840 px
HDMI LOOP	1	HDMI loop out (HDMI2.0)
OPT	1	Used for optical ports' backup or signal copy output
AUDIO OUT	1	3.5mm audio port

Control port

Type	Quantity	Specification
USB	1	Connect computer software to control
RJ45	2	For computer software control or multi-cascade control or central control
RS232	1	Use RS232 to central control

Machine Specification

Input Power Voltage	100~240V AC 50/60Hz
Power Consumption	50W
Operating Conditions	0°C~45°C
Dimension (L×W×H)	482.6×361.1×44.5mm
Weight	4.1kg



Shenzhen Magnimage Technology Co., Ltd.

Address: 801, Bld. G2, TCL International E City, #1001
Zhongshan Park Road, Nanshan, Shenzhen, China, 518052
Tel: 86-755-8664 7651 Fax: 86-755-8664 7650
Website: www.magnimage.com